

Compact axial fans which operate efficiently at high pressures. Thermostat operation with intelligent speed control




Reduced noise acoustics performance via exhaust air flow directed to the rear of enclosure

Breather to prevent internal condensation forming

Pitched roof with internal hinges

3-point locking system with the option of vandal resistant locking handle

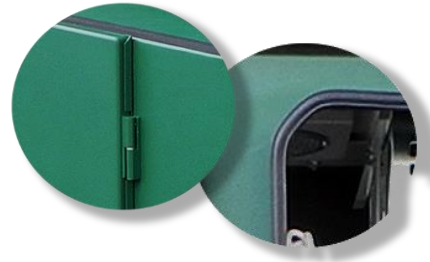

Rounded corner door seals providing up to IP65 rating; balloon seals for maximum compression

Option for door alarm contacts for access monitoring

Stainless steel lift off hinges with compression anti-pry bar protection strips

Door mounted long life, low maintenance & high efficiency corrugated filter


Wooden back board offering flexible mounting options for power distribution. Housed within a separate secure End Pod for convenient access



Louvered door design to optimise air flow & vandal resistance

Steel plinth allowing for cable management & unobstructed door access. Optional grounding root for ease of installation

Removable gland plate for cable entry

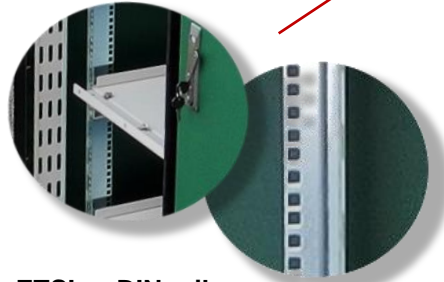

19 inch, ETSI or DIN rail mounting options; perforated shelving options & cable management trays



Socket strips mounted vertically or horizontally with range of AC Outlets



Thermostatically controlled anti-condensation heater

\* Please note: Images within this brochure may not reflect the exact product colours, please refer to RAL numbers at time of order.  
 \* The products displayed in this document may change without notice due to continuing product development and are for illustration purposes only.